

CELLULOSE TAPE

Clear Anti Static Tape

Clear Anti Static tape is designed for general applications in static free workstations. The product meets decay rate of MIL-B-81705, and is available on 1" Core (S5100 Series) & 3" Core (S5300 Series).



SPECIFICATIONS

Adhesion To Steel	40 oz./inch
Tensile Strength	25 lb./inch
Elongation	20%
Backing	Cellulose film
Adhesive	Rubber-Based, Non-Staining
Surface Resistivity	9.8X10E9 ohms/sq.
Application Temperature	50-130°
Thickness	2.4 mils
Charge Decay Time	0.12 (Seconds)

Number	Description	Length	Size
TP-12222	Clear Anti-Static	72 Yds.	1/2"
TP-12223	Clear Anti-Static	72 Yds.	3/4"
TP-12224	Clear Anti-Static	72 Yds.	1"
TP-12225	Clear Anti-Static	72 Yds.	2"

Clear Anti-Static Tape with ESD Symbols




This clear Anti Static Tape with PRINTED ESD SYMBOLS, is ideal for general packaging applications at the static free work areas. The tape has the wording "Anti Static Tape" and both the Reaching Hand & the Three-Arrow symbols printed in black color. This product is designed to meet the static decay rate of MIL-B-81705C, and is available in 72 Yards (66 Meters) long & on 3" Paper or Plastic Cores.

SPECIFICATIONS

Adhesion to Steel	40 oz./inch
Tensile Strength	25 lb./inch
Elongation	20%
Backing	Cellulose film
Adhesive	Rubber-Based, Non-Staining
Thickness	2.4 mils
Application Temperature	50-130° F (10-55° C)
Surface Resistivity	9.8X10E9 Ohms/Square
Decay Time	0.12 Seconds

Number	Description	Length	Size
TP-12227	Clear w/Symbols	72 Yds.	1/2"
TP-12228	Clear w/Symbols	72 Yds.	3/4"
TP-12229	Clear w/Symbols	72 Yds.	1"
TP-12229A	Clear w/Symbols	72 Yds.	2"

Red Anti Static Tape

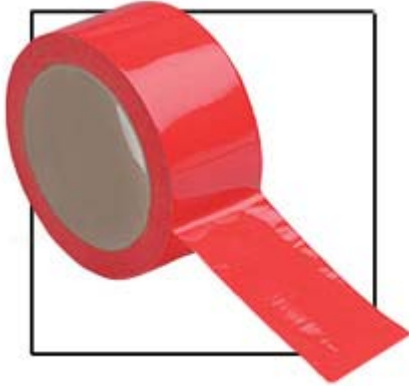

Red Anti Static tape is designed for general application in static free workstations. The product meets decay rate of MIL-B-81705, and is available on 3" Core, 72 Yards (66 Meters) Long Rolls.

SPECIFICATIONS

Thickness	0.057 mm
Weight	74g/sq m
Tensile Strength	900 g/25 mm
Peel Adhesion	950 g/25 mm
Temperature Resistance	130° C
Elongation at Break	18%
Surface Resistance	10E10 ohms/sq.
Charge Decay	Time 0.30 (Seconds)

Number	Description	Length	Size
TP-12260	Black Hi Temp Polyester	72 Yds.	1/4"
TP-12261	Hi Temp Polyester	72 Yds.	1/2"
TP-12262	Hi Temp Polyester	72 Yds.	3/4"
TP-12263	Hi Temp Polyester	72 Yds.	1"
TP-12264	Hi Temp Polyester	72 Yds.	2"

⚠ NOTE ⚠

Statements, technical information and recommendations contained herein are based on tests we believe to be reliable but they are not to be construed in any manner as warranties expressed or implied. the user shall determine the suitability of the product for his intended use and user assumes all risk and liability whatsoever in connection therewith.

This product should be kept away from direct exposure to sunlight and must be stored in a ventilated storage environment with temperature of 68° F (20° C).