



DP-8.5-11 Static Dissipative Sheet Protector
Sheet Protector, 2 mil, 8.625" x 11.25", 100/pack

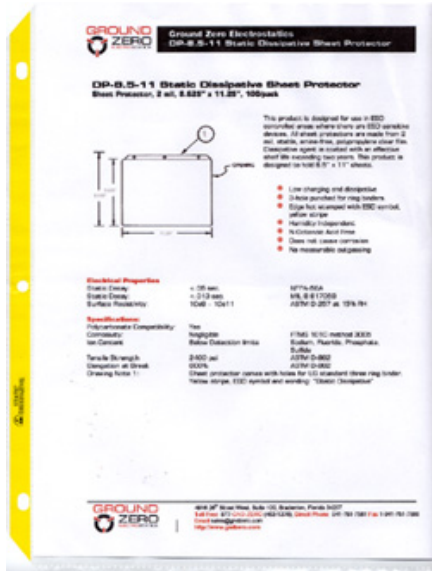

This product is designed for use in ESD controlled areas where there are ESD sensitive devices. All sheet protectors are made from 2 mil stable, amine-free, polypropylene clear film. Dissipative agent is coated with an effective shelf life exceeding two years. This product is designed to hold 8.5" x 11" sheets.

- ☀ Low charging and dissipative
- ☀ 3-hole punched for ring binders
- ☀ Edge hot stamped with ESD symbol, yellow stripe
- ☀ Humidity Independent
- ☀ N-Octononic Acid Free
- ☀ Does not cause corrosion
- ☀ No measurable outgassing

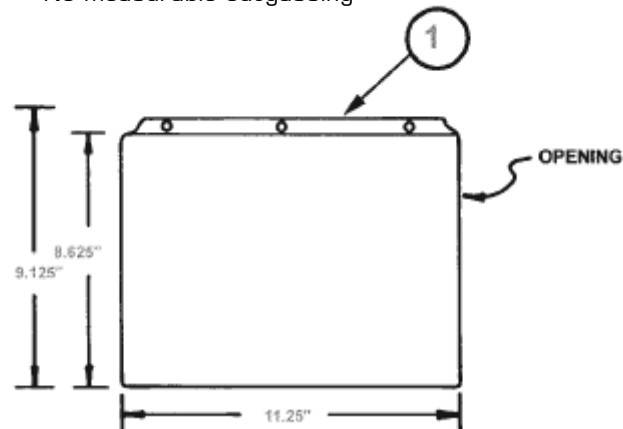

Electrical Properties

Static Decay:	<.05 sec.	NFPA-56A
Static Decay:	<.013 sec.	MIL B 81705B
Surface Resistivity:	10e9 – 10e11	ASTM D-257 at 15% RH

Specifications:

Polycarbonate Compatibility:	Yes	
Corrosivity:	Negligible	FTMS 101C method 3005
Ion Content	Below Detection limits	Sodium, Fluoride, Phosphate, Sulfide
Tensile Strength	2400 psi	ASTM D-882
Elongation at Break	600%	ASTM D-882
Drawing Note 1:	Sheet protector comes with holes for US standard three ring binder. Yellow stripe, ESD symbol and wording: "Static Dissipative"	